



GENERAL NOTES

1. STRAW BALES SHALL BE INSTALLED SO THAT THE BINDINGS ARE ORIENTED AROUND THE SIDES RATHER THAN ALONG THE TOPS AND BOTTOMS OF THE BALES. THE BALES SHALL BE A MINIMUM OF 36 INCHES IN LENGTH.
2. STRAW BALES SHALL BE KEVED INTO SOIL A MINIMUM OF 4" AND NO GAPS SHALL BE LEFT BETWEEN BALES.
3. STAKES SHALL BE A MINIMUM OF 48" IN LENGTH. STAKES SHALL BE EITHER 2" x 2" WOOD, 2.5" DIA. SCH. 40 STEEL POSTS, OR STANDARD STEEL 1" OR 1.5" POSTS.

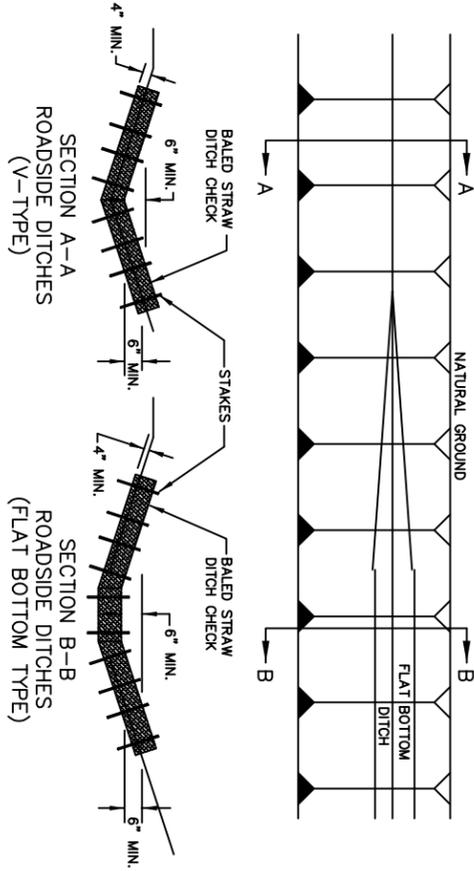


BALED STRAW DITCH CHECK
N.T.S.
EC.2.1

NUMBER OF SAND BAGS AND ARRANGEMENT VARIABLE WITH ON-SITE CONDITIONS.

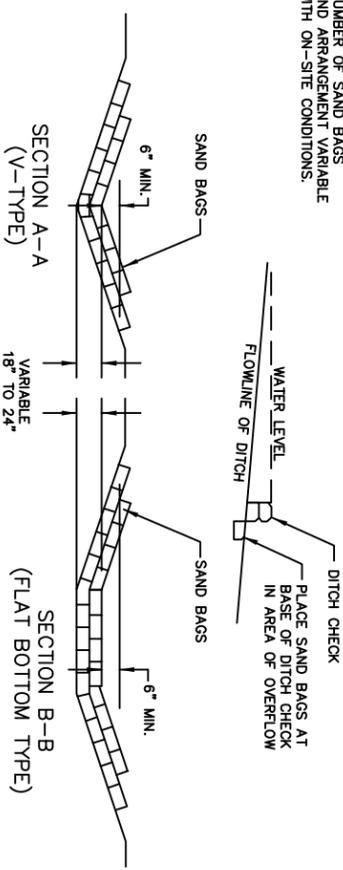


SAND BAG DITCH CHECK
N.T.S.
EC.2.2

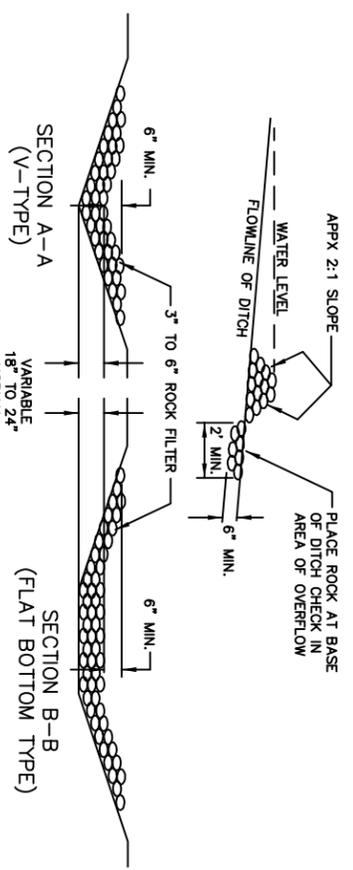


ROCK DITCH CHECK
N.T.S.
EC.2.3

NOTE: SIZE OF BASIN TO BE DETERMINED BY VOLUME REQUIRED, HOWEVER A MINIMUM LENGTH-TO-WIDTH RATIO OF 2:1 SHALL BE USED.

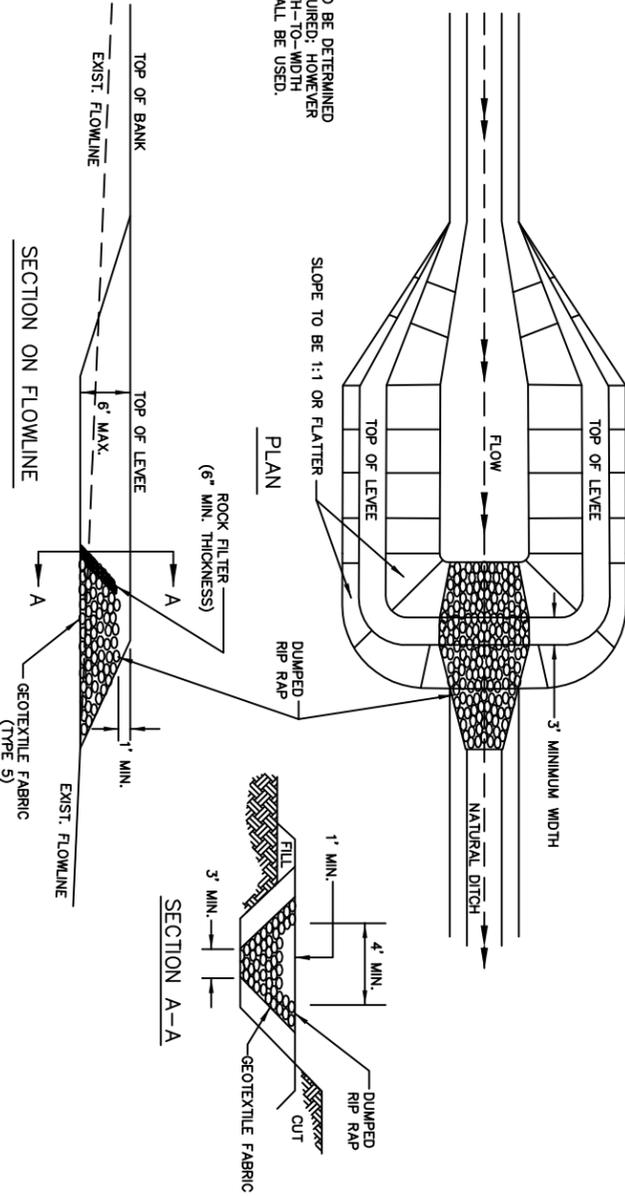

SEDIMENT BASIN WITH RIP RAP OUTLET
N.T.S.
EC.2.4


NOTE: SIZE OF BASIN TO BE DETERMINED BY VOLUME REQUIRED, HOWEVER A MINIMUM LENGTH-TO-WIDTH RATIO OF 2:1 SHALL BE USED.

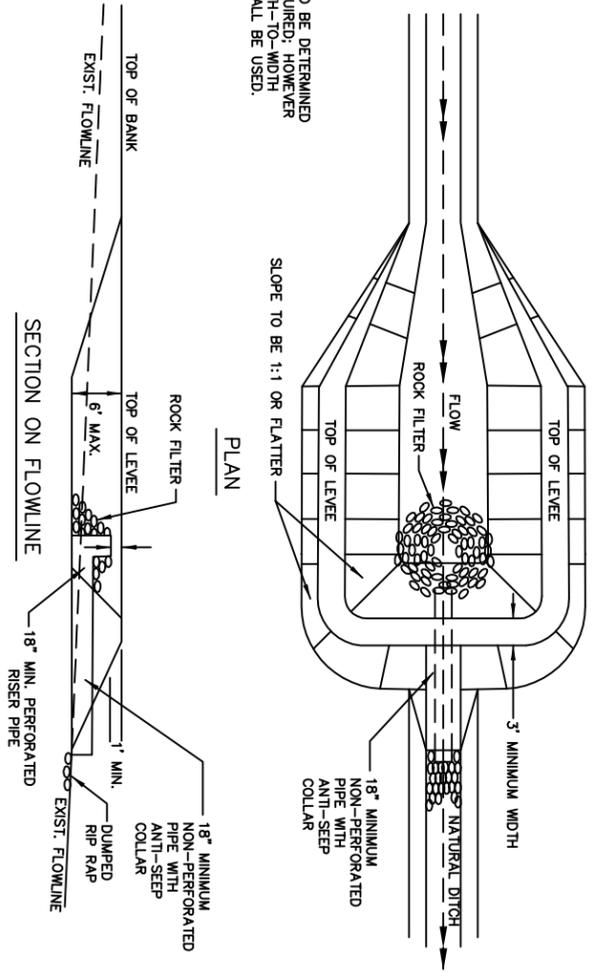

SEDIMENT BASIN WITH PIPE OUTLET
N.T.S.
EC.2.5

CONCRETE WASHOUT NOTES:

1. ACTUAL LAYOUT TO BE DETERMINED IN THE FIELD. CONCRETE WASHOUT AREA SHALL BE INSTALLED PRIOR TO ANY CONCRETE PLACEMENT ON SITE.
2. STAKES SHALL BE A MINIMUM OF 48" IN LENGTH. STAKES SHALL BE EITHER 2" x 2" WOOD, 2.5" DIA. SCH. 40 STEEL POSTS, OR STANDARD STEEL 1" OR 1.5" POSTS.
3. SIGNS SHALL BE PLACED AT THE CONSTRUCTION ENTRANCE, AT THE WASHOUT AREA, AND ELSEWHERE AS NECESSARY TO CLEARLY INDICATE THE LOCATION OF THE CONCRETE WASHOUT AREA TO OPERATIONS OF CONCRETE TRUCKS.
4. TEMPORARY CONCRETE WASHOUT FACILITIES SHALL BE MAINTAINED TO PROVIDE ADEQUATE HOLDING CAPACITY WITH A MINIMUM FREEBOARD OF FOUR (4) INCHES.
5. WASHOUT FACILITIES MUST BE CLEANED, OR NEW FACILITIES CONSTRUCTED AND READY FOR USE ONCE THE WASHOUT AREA 75% FULL.
6. AT THE END OF CONSTRUCTION, THE CONCRETE WASHOUT AREA AND ALL WASTE CONCRETE SHALL BE REMOVED FROM THE SITE AND DISPOSED OF AT AN ACCEPTED WASTE SITE. WHEN THE WASHOUT AREA IS REMOVED, THE DISTURBED AREA SHALL BE TOPSOILED AND SODDED OR OTHERWISE STABILIZED IN A MANNER ACCEPTED BY THE CITY.

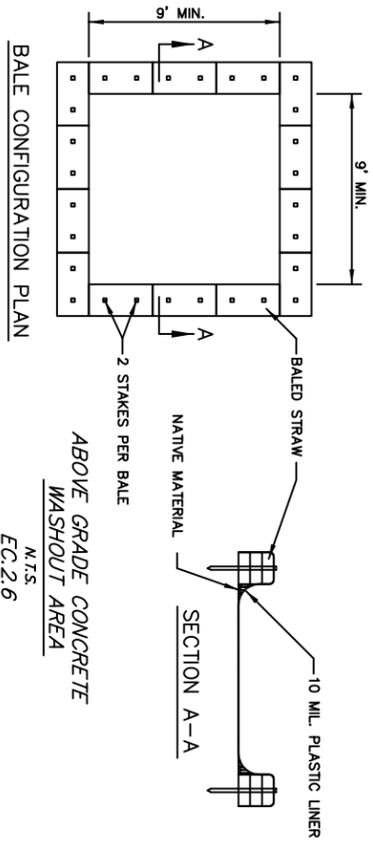

BALE CONFIGURATION PLAN
N.T.S.
EC.2.6

Revision	Date	BY

Standard Drawings
EROSION CONTROL - BARRIERS
Public Works Construction



CITY OF FORT SMITH
Engineering Department
623 Garrison Avenue, Room 409
Fort Smith, Arkansas 72901
Phone (479)784-2225 Fax (479)784-2245

Project:	Details
Date:	NOV 2012
Scale:	As Shown
Drawn By:	RBR
Dwg. No.:	EC2
Sheet No.:	8