

RESOLUTION NO. R-154-24


RESOLUTION AUTHORIZING THE PURCHASE OF A TRI-AXLE DUMP TRUCK FOR THE DRAINAGE PROGRAM OF THE STREETS & TRAFFIC CONTROL DEPARTMENT

BE IT RESOLVED BY THE BOARD OF DIRECTORS OF THE CITY OF FORT SMITH, ARKANSAS, THAT:

The bid, indicated on the enclosure attached hereto, for the purchase of a 2025 tri-axle dump truck from Carco International, Inc., for \$199,999.68 is accepted.


This Resolution adopted this 20th day of August 2024.

APPROVED:

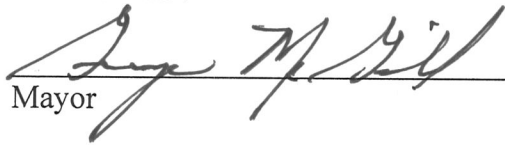

Mayor

ATTEST:



City Clerk

Approved as to form:



No publication required



International Trucks is pleased to provide you with this proposal compliant with all terms of the Sourcewell Vehicles and Chassis Contract #060920-NVS awarded to Navistar, Inc for new International Trucks. If you have any questions regarding enrollment in Sourcewell or detailed contract terms and conditions, please see your International Truck sales representative.

PROPOSAL PREPARED FOR:		PROPOSAL PREPARED BY:	
Sourcewell Member:	City of Fort Smith	Carco International, Inc.	
Contact:	Allie Bahsoon	Patrick Jacobs	
Address:	623 Garrison Ave	2721 Midland Blvd	
City/State/Zip:	Fort Smith, AR 72903	Fort Smith, AR 72904	
Phone:	(479) 784-2267	(479) 441-3276	
Email:	abahsoon@fortsmithar.gov	pljacobs@carcoinc.com	

Proposal Number	4332
Date	7/30/2024
Quantity of this Specification	1
Single Sourcewell Transaction Total Volume	1

Chassis		
New 2025 International HX520 /X15 Chassis		\$ 319,149.00
Base Chassis List	\$ 255,985.00	
Options List	\$ 63,164.00	
Sourcewell Contract Discount	49.1%	\$ (156,748.12)
Volume Incentive		\$ -
Material Price Increases		\$ -
Net Sourcewell Chassis Price		\$ 162,400.88
Sourcewell Partner Body		
		\$ -
Handling Fee	4.00%	\$ -
Non-Sourcewell Dealer Supplied Body		
Hilbilt Dump Body		\$ 36,966.00
Handling Fee	5.00%	\$ 1,848.30
Additional Post Build Work		
DOT, Fire Ext, Fuel, Def		\$ 750.00
Handling Fee	5.00%	\$ 37.50
Service Contracts		
		\$ -
		\$ -
		\$ -
Additional Freight		
Hilbilt to Fort Smith		\$ 650.00
		\$ -
Additional Floorplan		
		\$ -
		\$ -
Additional Fees & Taxes		
		\$ -
		\$ -
		\$ -
Final Sourcewell Per Vehicle Price FOB Fort Smith AR		\$ 199,999.68
Final Sourcewell Total Vehicle(s) Price		\$ 199,999.68
<i>Additional Sourcewell Qualified Content</i>		
Customer Parts Credit - Fleet Charge only	\$200	
A26 Incremental Parts Credit - Fleet Charge only	\$200	
Silver Package Award	\$1,200	

Terms:

Stock unit in dealer's inventory, dealer will accept a final purchase order using the current Sourcewell pricing quoted above.

Dealer placing a new orders for the Sourcewell Member, the purchase order cannot be firmed up until the unit is slotted to build with a firm build date or lineset. Once a firm build date has been established, dealer will provide the Sourcewell Member approved pricing and a final purchase order can be accepted with firm pricing. Dealer cannot guarantee bodies and/or equipment pricing added to the chassis for a turnkey sale until chassis is lineset.



Hx520 SFA

**Sales Proposal For:
CITY OF FORT SMITH**

**Presented By:
CARCO INTL INC**

Prepared For:
CITY OF FORT SMITH
Alie Bahsoon
623 Garrison Ave. Room 522
FORT SMITH, AR 72902-
(479)784 - 2267
Reference ID: N/A

Presented By:
CARCO INTL INC
Patrick R Jacobs
2721 MIDLAND BLVD
FORT SMITH AR 72904 -
(479)441-3270

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.



Model Profile
2026 HX520 SFA (HX520)

AXLE CONFIG:	6X4
APPLICATION:	Construction Dump
MISSION:	Requested GVWR: 58000. Calc. GVWR: 76350. Calc. GCWR: 130000 Calc. Start / Grade Ability: 21.95% / 2.32% @ 55 MPH Calc. Geared Speed: 93.2 MPH
DIMENSION:	Wheelbase: 228.00, CA: 138.00, Axle to Frame: 57.00
ENGINE, DIESEL:	{Cummins X15 430V} Productivity Series, EPA 2024, 430HP @ 1900 RPM, 1650 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 441 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 4000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-18-133A} Wide Track, I-Beam Type, 18,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, Driver Controlled Locking Differential in Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 4.30
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 385/65R22.5 Load Range L HAC 3 (CONTINENTAL), 479 rev/mile, 68 MPH, All-Position
TIRE, REAR:	(8) 11R24.5 Load Range H HDL2 DL+ (CONTINENTAL), 468 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, TANDEM:	{Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings
PAINT:	Cab schematic 100LY Location 1: 4421, School Bus Yellow (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
HX52000	Base Chassis, Model HX520 SFA with 228.00 Wheelbase, 138.00 CA, and 57.00 Axle to Frame.	8886/7472	16358

AXLE CONFIGURATION

1AND	AXLE CONFIGURATION {Navistar} 6x4	121/227	348
	<u>Notes</u> : Pricing may change if axle configuration is changed.		

ENGINE

12EWV	ENGINE, DIESEL {Cummins X15 430V} Productivity Series, EPA 2024, 430HP @ 1900 RPM, 1650 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 441 Peak HP (Max)	0/0	0
12VJT	EMISSION, CALENDAR YEAR {Cummins X15} EPA, OBD and GHG Certified for Calendar Year 2024	0/0	0
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty	0/0	0
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations	0/0	0
12WVG	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood	0/0	0
12XBC	RADIATOR Aluminum, Welded, Down Flow, Front to Back System, 1325 SqIn, with 806 SqIn Charge Air Cooler	0/0	0
	<u>Includes</u> : RADIATOR HOSES Premium, Rubber		
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed	0/0	0
	<u>Includes</u> : FAN Nylon		
12VCB	AIR CLEANER Dual Element, with Pre-Cleaner, Engine Mounted	0/0	0
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
12864	BLOCK HEATER, ENGINE {Phillips} 120V/1500W	2/0	2
	<u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door		
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted	0/0	0
12WCX	HOSE CLAMPS, RADIATOR HOSES {Gates} Shrink Band Type	0/0	0
12WYZ	RADIATOR DRAIN & FILL FITTING SPECIAL; To Vacuum Out or Fill the Cooling System from the Bottom of Radiator, for Use with Quick-Connect Radiator Drain Tool or Shop Coolant Evacuation-Fill System	0/0	0

TRANSMISSION

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
13BDY	TRANSMISSION, AUTOMATIC {Allison 4000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway	166/82	248
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223	0/0	0
13WHL	OIL COOLER, TRANSMISSION Remote Mounted, for Automatic Transmission	0/0	0
13XAA	PTO CONTROL, DASH MOUNTED For Customer Provided PTO; Includes Switch, Electric/Air Solenoid, Piping and Wiring	5/0	5
13WYU	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming	0/0	0
13WLM	TRANSMISSION OIL Synthetic; 63 thru 76 Pints	0/0	0
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission	1/0	1

CLUTCH

11001	CLUTCH Omit Item (Clutch & Control)	-103/-30	-133
-------	-------------------------------------	----------	------

REAR AXLES, SUSPENSIONS

14GRP	AXLE, REAR, TANDEM {Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, Driver Controlled Locking Differential in Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 4.30	0/495	495
14UMX	SUSPENSION, REAR, TANDEM {Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings	0/37	37
14WNH	AXLE, PUSHER, LIFT TYPE {Watson & Chalin SL1190SSR Tru-Trk Alumilite} 13,500-lb Capacity, One Self-Steer Axle	273/546	819
14UAB	AXLE SPACING, FIRST PUSHER 49" Ahead of Drive Axle	0/0	0
14RBC	AXLE, LIFT, CONTROLS for One Lift Axle; All Controls Inside Cab; Includes Pressure Gauge, Pressure Regulator Switch, Lift/Lower Switch, Inside Cab on Dash	0/0	0
14WBA	LIFT AXLE ENGR REVIEW Special Quotation to Allow Engineering Review of Lift Axle Configurations	0/0	0
14WMK	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 65 thru 89.99 Pints	0/0	0
14862	PDL WARNING BUZZER Power Divider Lock	0/0	0
14WCP	TORQUE RODS {Hendrickson} TRAAX Rods, Longitudinal Only	0/-6	-6
14WCR	TRANSVERSE TORQUE RODS {Hendrickson} TRAAX Rod, Transverse Only	0/-8	-8

FRONT AXLES

2ARZ	AXLE, FRONT NON-DRIVING {Meritor MFS-18-133A} Wide Track, I-Beam Type, 18,000-lb Capacity	186/0	186
------	---	-------	-----

FRONT SUSPENSIONS

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
3ADG	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 18,000-lb Capacity, with Shock Absorbers	150/0	150
CABS, COWLS, BODIES			
16030	CAB Conventional, Day Cab	0/0	0
	<u>Includes</u> : CAB REAR SUSPENSION Air : CLEARANCE/MARKER LIGHTS (5) LED Roof Mounted : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CONSOLE, CENTER Includes Two Cup Holders and One Additional Storage Area : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : COURTESY LIGHT (2) Driver and Passenger Door Mounted : DOME LIGHT, CAB Rectangular, Door and Instrument Panel Mounted Switch Activated, Timed Theater Dimming, Center Mounted, Integral to Console : FLOOR COVERING Rubber, Black : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (4) "B" Pillar and Door Mounted, Two Each Side : READING LIGHT, CAB Located in Overhead Console : STORAGE POCKET, DOOR (2) Full Length, Driver and Passenger Door		
16XTM	ACCESS, CAB Aluminum, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab or Sleeper Cab	0/0	0
16BAM	AIR CONDITIONER with Integral Heater and Defroster	0/0	0
	<u>Includes</u> : HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps		
16VKK	CAB INTERIOR TRIM Diamond, for Day Cab	0/0	0
16GEG	GAUGE CLUSTER Premium Level; English with English Electronic Speedometer	0/0	0
	<u>Includes</u> : GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/ Refill for : GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure : WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)		
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} Mounted in Instrument Panel	2/0	2
16SDC	GRAB HANDLE, EXTERIOR (2) Chrome, Towel Bar Type, with Anti-Slip Rubber Inserts, for Cab Entry Mounted Left and Right Side at B-Pillar	6/0	6
16XJP	INSTRUMENT PANEL Wing Panel	0/0	0
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16SNS	MIRRORS (2) Aero Pedestal, Power Adjust, Heated, Black Heads and Arms, 6.5" x 14" Flat Glass, Includes 6.5" x 6" Convex Mirrors, for 102" Load Width	0/0	0

Notes

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: Mirror Dimensions are Rounded to the Nearest 0.5"		
16SNW	MIRROR, CONVEX, LOOK DOWN Right Side, Black, 6" x 10.5"	3/0	3
16SPA	MIRROR, CONVEX, HOOD MOUNTED (2) Right and Left Sides, Black, 7.5" x 7"	11/-1	10
16XRX	MODESTY PANEL Painted	0/0	0
16VLV	MONITOR, TIRE PRESSURE Omit	-9/-2	-11
16LWK	SEAT, DRIVER {ISRI} Series 300, Air Suspension, High Back, Vinyl, Single Chamber Lumbar, Inboard Armrest, Suspension Cover, Fore/Aft Isolator, Cushion Extension, Seat Tilt	0/0	0
16SRN	SEAT, PASSENGER {ISRI} Series 300, Air Suspension, High Back, Vinyl, Single Chamber Lumbar, Inboard Armrest, Suspension Cover, Fore/Aft Isolator, Cushion Extension, Seat Tilt	60/27	87
16XWV	SUNSHADE, EXTERIOR Aerodynamic, Painted Roof Color, with Integral LED Clearance/Marker Lights	16/1	17
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	0/0	0
FRAMES			
1CGD	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 12.50" x 3.750" x 0.500" (317.5mm x 95.25mm x 12.7mm); 480.8" (12212mm) Maximum OAL	272/376	648
1LPG	BUMPER, FRONT Gull Wing, Aluminum, Stainless Steel Clad, Heavy Duty	0/0	0
1AMS	CROSSMEMBER, FRAME TIE for Heavy Duty	52/4	56
1652	CROSSMEMBER, REAR Relocated to End of Frame	-17/82	65
1WRW	TOW HOOK, FRONT (2) Frame Mounted; 80,000-lb. Total Capacity	15/0	15
1WXD	WHEELBASE RANGE 211" (535cm) Through and Including 256" (650cm)	123/-123	0
BRAKES			
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
	<u>Includes</u>		
	: BRAKE LINES Color and Size Coded Nylon		
	: PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel		
	: PARKING BRAKE VALVE For Truck		
	: QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4		
	: SPRING BRAKE MODULATOR VALVE SR-7 with relay valve for 6x4/8x6		
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System	0/0	0
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake	1/0	1
4XDT	BRAKES, FRONT {Meritor 16.5X6 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 6", 23,000-lb Capacity	33/0	33
4ETE	BRAKE CHAMBERS, FRONT AXLE {Haldex} 24 SqIn	3/0	3
4LAG	SLACK ADJUSTERS, FRONT {Gunite} Automatic	14/0	14

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
4XDR	BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle	0/104	104
4EXR	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/36 SqIn Spring Brake	0/46	46
4LGG	SLACK ADJUSTERS, REAR {Gunitite} Automatic	0/28	28
4XEE	PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type	0/30	30
4JBR	BRAKES, PUSHER AXLE Air S-Cam Type, 15" x 4.0", Includes MGM 20 Sq.In. Brake Chambers, Furnished with One Pusher Lift Axle	0/0	0
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM	0/0	0
4EDM	AIR DRYER {Bendix AD-HF} with Heater, Includes Pressure Protection Circuits, Safety Valve, Integral Purge Tank, Governor Pressure Settings 110 psi Cut-In/130 psi Cut-Out, Integrated PuraGuard Coalescing Filtration	0/0	0
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab	0/0	0
4VKK	AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Right Rail, Back of Cab, Perpendicular to Rail	0/0	0
4WXR	DRAIN VALVE (2) {Berg} with Pull Chains, for Air Tanks	0/0	0
4619	TRAILER CONNECTIONS Four-Wheel, with Hand Control Valve and Tractor Protection Valve, for Straight Truck	2/0	2
STEERING			
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power	84/-4	80
5710	STEERING COLUMN Tilting and Telescoping	0/0	0
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black	0/0	0
DRIVELINES			
6DGU	DRIVELINE SYSTEM {Dana Spicer} SPL250 Main Driveline with SPL170 Interaxle Shaft, for 6x4	0/0	0
EXHAUST SYSTEMS			
7BLY	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Cab Mounted Right Side	0/0	0
7BES	AFTERTREATMENT COVER Polished Aluminum	9/2	11
7SAP	ENGINE COMPRESSION BRAKE {Cummins} Interbrake For Cummins Signature/ ISX/X15 Engines; Furnished with Engine	0/0	0
7WCK	EXHAUST HEIGHT 12' 6"	6/2	8
7WDN	MUFFLER/TAIL PIPE GUARD (1) Aluminum	12/8	20
7WAZ	TAIL PIPE (1) Turnback Type	-9/-4	-13
ELECTRICAL SYSTEMS			
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
	<u>Includes</u>		

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel		
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever		
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light		
	: STARTER SWITCH Electric, Key Operated		
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector		
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever		
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted		
8GXJ	ALTERNATOR {Leece-Neve AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount	0/0	0
8RPR	ANTENNA for Increased Roof Clearance Applications	1/0	1
8THB	BACK-UP ALARM Electric, 102 dBA	0/3	3
8VUK	BATTERY BOX Aluminum, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab	0/0	0
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud	0/0	0
8HAE	BODY BUILDER WIRING Rear of Frame; Includes Sealed Connectors for Tail/ Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	3/0	3
8RJW	CB RADIO Omit Power Feeds, Power Source and Wiring	0/0	0
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses	0/0	0
8WXB	HEADLIGHT WARNING BUZZER Sounds When Head Light Switch is on and Ignition Switch is in "Off" Position	0/0	0
8XNY	HEADLIGHTS Halogen	0/0	0
8653	HORN, AIR Single, Located Under Cab	0/0	0
8541	HORN, ELECTRIC (2) Disc Style	1/0	1
8RPT	RADIO AM/FM/WB/Clock/USB Input/Auxiliary Input	3/0	3
8RMZ	SPEAKERS (2) 6.5" Dual Cone Mounted in Both Doors, (2) 5.25" Dual Cone Mounted in Both B-Pillars	0/0	0
8WTL	STARTING MOTOR {Delco Remy 39MT} 12 Volt, Gear Reduced, with Thermal Over-Crank Protection	1/0	1
8TMG	TRAILER CONNECTION SOCKET {Phillips} 7-Way, Mounted at Rear of Frame, Wired for Turn Signals Combined with Stop, Compatible with Trailers with Combined Stop, Tail, Turn Lamps	0/0	0
8WEZ	TURN SIGNAL SWITCH Self-Canceling	0/0	0
FRONT END			
9ASE	FRONT END Tilting, Composite	0/0	0
9WAC	BUG SCREEN Mounted Behind Grille	5/0	5
9585	FENDER EXTENSIONS Rubber	13/0	13
9HCN	GRILLE Chrome Vertical Accent Bars, with Black Mesh	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
9AAB	LOGOS EXTERIOR Model Badges	0/0	0
9AAE	LOGOS EXTERIOR, ENGINE Badges	0/0	0
SPEEDOMETER, TOOLS, MISC			
10AGB	COMMUNICATIONS MODULE Telematics Device with Over the Air Programming; Includes Five Year Data Plan and International 360	0/0	0
10BAE	LABEL, DEF "DEF ONLY"	0/0	0
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10WCY	SAFETY TRIANGLES	5/1	6
10NZL	SPECIAL RATING, GVWR Limited to 80,000-lb GVWR	0/0	0
FUEL TANKS			
15SGL	FUEL TANK Non-Polished Aluminum, 24" Dia, 80 US Gal (303L), Mounted Left Side, Under Cab	10/-3	7
15WEY	DEF TANK 10.8 US Gal (41L) Capacity, Frame Mounted Outside Left Rail, Under Cab	0/0	0
15LNA	FUEL HEATER {Cummins} Plumbing for Thermal Recirculation Valve (TRV) Mounted to Cummins X15 Engines, Thermostatically Controlled	0/0	0
15LRT	FUEL/WATER SEPARATOR {Racor 6600} 12 VDC Electric Heater, Includes Pre-Heater, with Sight Bowl, Includes Water-In-Fuel Sensor	-2/0	-2
WHEELS, TIRES - FRONT			
27DUM	WHEELS, FRONT {Accuride 29806} DISC; 22.5x12.25 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs, Offset 4.63"	104/0	104
7792655441	(2) TIRE, FRONT 385/65R22.5 Load Range L HAC 3 (CONTINENTAL), 479 rev/mile, 68 MPH, All-Position	78/0	78
WHEELS, TIRES - REAR			
28DPR	WHEELS, REAR {Accuride 28827} DUAL DISC; 24.5x8.25 Rims, Powder Coat Steel, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and with Steel Hubs	0/152	152
7384225447	(8) TIRE, REAR 11R24.5 Load Range H HDL2 DL+ (CONTINENTAL), 468 rev/mile, 75 MPH, Drive	0/96	96
WHEELS, TIRES - LIFT AXLE			
34ACJ	WHEELS, LIFT AXLE PUSHER {Accuride 51408} Single Wheels, For One Lift Axle; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut << Pricing Includes Standard Tires >>	93/267	360
7702495809	(2) TIRE, PUSHER 295/75R22.5 Load Range G AH37 (HANKOOK), 513 rev/mile, 75 MPH, All-Position	0/0	0

Services Section:

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
WARRANTY			
40132	WARRANTY Standard for HX520, HX620, Effective with Vehicles Built January 1, 2021 or Later, CTS-2015B	0/0	0
40RBG	SERVICES, TOWING {Navistar} Service Call to 24-Month/Unlimited Mileage to the Nearest Navistar Dealer for Navistar Warrantable Failure as Contract Defined; Includes Engine Failure if Supplier Declines Tow Coverage & ESC Supplied thru Navistar; \$550 (USA) Maximum Benefit per Incident	0/0	0
40YLM	SRV CONTRACT, EXT CMS ENG/AFTR {Cummins} To 60-Month/100,000 Miles (160,000 km), Extended Cummins X15 Efficiency or Productivity Series Engine Coverage, Protection Plan 1 and Aftertreatment	0/0	0
40XBH	SRV CONTRACT, EXT COOLING SYS {Navistar} To 24-Month/100,000 Miles (160,000 km)	0/0	0
40XCL	SRV CONTRACT, EXT ELECTRICAL {Navistar Prepackaged Components} Excludes Starter and Alternator, To 36-Month/150,000 Miles (240,000 km)	0/0	0
40XTT	SRV CONTRACT, EXT HTR/AC SYS {Navistar Prepackaged Components} To 36-Month/300,000 Miles (480,000 km)	0/0	0
40XGK	SRV CONTRACT, EXT STARTER/ALT {Navistar Prepackaged Components} Covers Starter and Alternator Only, To 24-Month/150,000 Miles (240,000 km)	0/0	0
	Total Component Weight:	10691/9907 (lbs)	20598 (lbs)
1	16.5' Hilbilt body and install	0/0	0
2	DEF	0/0	0
3	DOT	0/0	0
4	Fire Ext	0/0	0
5	Fuel	0/0	0
6	Paint Pushers	0/0	0
	Total Body Allied:	0/0 (lbs)	0 (lbs)

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

July 24, 2024

Carco International
Re City of Fort Smith

16' HilBilt Mongoose XL Dump Body Installed
138-144" Clear Usable Cab to Center of Tandem Measurement Recommended
48" Side Height / 54" Tailgate Height
Crossmembers Where Sheets Join
8" Tubing Main Frame
3/16" AR450 Front, Sides & Floor
3/16" AR450 Hi-Lift Combo Tailgate
4" X 6" X 3/16" Tubing Top Rail
6" Wood Boards Unpainted
Heavy Duty Pipe Apron
6" Oval LED S/T/T Lights in Rear Ribs (1 Each Side)
1 Pair of Oval LED Strobes Mounted in Front of Cab Protector
1 Pair of oval LED Strobes Mounted in Rear Ribs (1 each Side)
Aero Industries Electric "Flip" Tarp Installed (Mesh)
Air Operated Pump / Hot Shift PTO for Allison Transmission
Standard DOT LED Lighting
24" Cab Protector
Ladder & 2 Inside Body Steps Installed
Front Metal Gravel Guards
Standard HilBilt Green in Color

\$31,981.00 Installed

Install Standard HilBilt 30 Ton Hitch, 1" Plate, D-Rings & Gussets
Tie into Dealer/Chassis Supplied Electric at Rear of Truck
Truck Must be Equipped for Brake Controller Installation
Install 6 & 7 Way Receptacles / Install Brake Controller
Install LED S/T/T Lights w/ Integrated Back Up Lights on ea. Side of Hitch Plate
Install Gladhands on Hoses

\$3,185.00 Installed

Quote is valid for 7 business days. If the chassis is scheduled to arrive after 12/29/2024 the quote is subject to change

FOB Benton, AR. / Dealer Quote: FET or State Sales Taxes not included

Thank you for allowing HilBilt to quote your equipment needs.

Danny Golden (501) 993-1902